

OUTDOOR DIGITAL SIGNAGE

KIOSK PORTRAIT TYPE SCREEN

CLASS

MODEL

32"

H327SSI

KEY FEATURES

- Special DOOH LCD Panel
- USB Plug & Play (JPG & MP4)
- All Weather Capable (IP66)
- Sunlight Readable
- Anti-Vandal Protection
- Non AC cooled system
- Auto Brightness Control
- Remote Control (RS232)
- Easy to Service with Front Door Open
- Cabinet Housing Color : RAL7040
- Capacitive Touch applied

Broadcast your branding with Hyundai Digital Signage!

HYUNDAI's Outdoor Digital Signage represents state-of-art display technology for any outdoor environment. Meeting the highest industrial standards they are provide a high degree of operational reliability and superior quality image, which are essential preconditions for attracting the attention of your target audience.



HYUNDAI

HYUNDAI

SPECIFICATIONS

Model	H327SSI						
Screen Size (diagonal)	32"						
Active Display Area (inch mm)	27.496 x 15.465 698.40 x 392.85						
Resolution	1920 x 1080						
Aspect Ratio	16 : 9						
Display Colors	16.7 M						
Brightness (cd/m ² ; typ.)	2,500						
Contrast Ratio	4,000 : 1						
Response Time (ms; GTG)	8						
Viewing Angle	178° / 178°						
Lifetime (hours)	70,000						
Backlight type	LED						
Response Time (ms)	50 - 100						
Interface	USB 2.0						
Touch Intensity	Permanent (protected by glass)						
Detection Method	PCT						
Input	1xVGA 3xHDMI 1xPC audio 1xRS232C 1x IR 1xUSB(Media Player)						
Media Player (USB)	<table border="1"> <tr> <td>Movie</td> <td>MPEG-2 MPEG-4</td> </tr> <tr> <td>Photo</td> <td>JPEG PNG BMP</td> </tr> <tr> <td>Music</td> <td>MP3</td> </tr> </table>	Movie	MPEG-2 MPEG-4	Photo	JPEG PNG BMP	Music	MP3
Movie	MPEG-2 MPEG-4						
Photo	JPEG PNG BMP						
Music	MP3						
Operating Voltage	100 - 240 VAC						
Consumption (typ.)	164W (Without PC)						
Consumption per nits (max.)	0.0656 W						
Heating Unit	Typ: 650W (Max: 850W)						
Auto Cooling System	Yes						
Auto Heating System	Yes						
Anti-Vandal Glass	Yes (8mm = 3mm+3mm)						
Anti Reflection Coating	Yes						
Auto Brightness Sensor	Yes						
Temperature (°C)	-30 ~ 50						
Humidity (%)	20 - 80						
Storage (°C)	-40 ~ 60						
OSD Language	12 Lang						
Ingress Protection	IP66						
Dimension Set (W x H x D), inch mm	26.59 x 66.93 x 5.91 675.3 x 1700 x 150						
Weight Set (lb kg)	218.26 99						
Mounting (Bottom mounting)	M10 wedge anchor (6 pcs)						

Specifications and design are subject to change without notice. See our website for detailed information.

HEAD OFFICE - HYUNDAI IT CO., LTD.
5F, 36, Sangil-ro 10-gil, Gangdong-gu, Seoul, 05288 Korea
Tel. +82 70 7008 0151 E-mail: ssoh@hdit.co.kr
www.hyundaiit.com

HYUNDAI IT AMERICA TECH.
2051 Junction AVE., Suite 112 San Jose, CA 95131, USA
Tel. +1 408 954 8920 email : sales@hyundaiita.com
www.hyundaiit.com

HYUNDAI IBT GMBH
Carl-Zeiss-Str. 9
55129 Mainz, Germany
Tel. +49(0) 6122-70342-10 email : info@hyundaiit.eu
www.hyundaiit.eu

OUTDOOR DIGITAL SIGNAGE

MODEL

CLASS

H327SSI

32"

FEATURES

All Weather Capable

Equipped with an intelligent cooling and heating system, HYUNDAI's Outdoor Displays are well suited for withstanding any weather conditions from -30°C to +50°C.

Sunlight Readable

HYUNDAI provides special displays which are based on the Optical Bonding for installations in environment with the brightest lightning conditions. Make your messages and images clear and readable under even bright sunlight.

Anti-Vandal Protection


Thanks to a special tempered security glass, HYUNDAI's Outdoor Displays are protected against any vandalism attacks using Anti-Vandal glass bonding technique improving in durability from outside damage.

Cost Effective Media Player

HYUNDAI IT's display serves in-built media player enables to play various range of content including video, images and photos. Thanks to this solution, no need for an additional media player for cost and space efficiency.

DIMENSIONS

[unit: mm | [inch]]

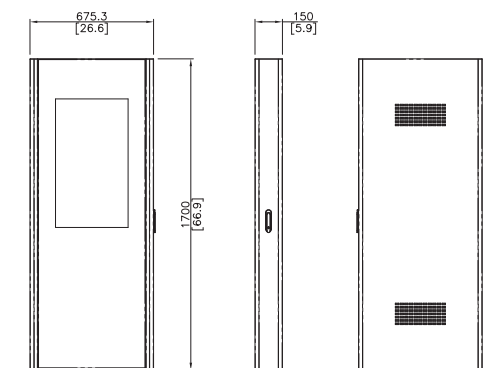

UPDATE : JUN. 2020