

OUTDOOR DIGITAL SIGNAGE

KIOSK PORTRAIT TYPE SCREEN

CLASS

MODEL

75"

H757SSV

KEY FEATURES

- Special DOOH LCD Panel
- USB Plug & Play (JPG & MP4)
- All Weather Capable (IP66)
- Sunlight Readable
- Anti-Vandal Protection
- Non AC cooled system
- Auto Brightness Control
- Remote Control (RS232)
- Easy to Service with Front Door Open
- Cabinet Housing Color : RAL7040

HYUNDAI

Broadcast your branding with Hyundai Digital Signage!

HYUNDAI's Outdoor Digital Signage represents state-of-art display technology for any outdoor environment. Meeting the highest industrial standards they are provide a high degree of operational reliability and superior quality image, which are essential preconditions for attracting the attention of your target audience.



HYUNDAI

SPECIFICATIONS

Model	H757SSV										
Screen Size (diagonal)	75"										
Active Display Area (inch mm)	64.95 x 36.533 1649.664 x 927.936										
Resolution	3840 x 2160										
Aspect Ratio	16 : 9										
Display Colors	1.07B										
Brightness (cd/m ² ; typ.)	3,000										
Contrast Ratio	1200 : 1										
Response Time (ms; GTG)	8										
Viewing Angle	178° / 178°										
Lifetime (hours)	50,000										
Backlight type	LED										
Input	1xVGA 3xHDMI 1xPC audio 1xRS232C 1x IR 1xUSB(Media Player)										
Media Player (USB)	<table border="1"> <tr> <td>Movie</td> <td>MPEG-2 MPEG-4</td> </tr> <tr> <td>Photo</td> <td>JPEG PNG BMP</td> </tr> <tr> <td>Music</td> <td>MP3</td> </tr> </table>	Movie	MPEG-2 MPEG-4	Photo	JPEG PNG BMP	Music	MP3				
Movie	MPEG-2 MPEG-4										
Photo	JPEG PNG BMP										
Music	MP3										
Power	<table border="1"> <tr> <td>Operating Voltage</td> <td>100 - 240 VAC</td> </tr> <tr> <td>Consumption (Typ.)</td> <td>750 W</td> </tr> <tr> <td>Consumption per nits (Max.)</td> <td>0.25 W</td> </tr> <tr> <td>Heating Unit</td> <td>Typ: 1.2KW (Max: 1.7KW)</td> </tr> </table>	Operating Voltage	100 - 240 VAC	Consumption (Typ.)	750 W	Consumption per nits (Max.)	0.25 W	Heating Unit	Typ: 1.2KW (Max: 1.7KW)		
Operating Voltage	100 - 240 VAC										
Consumption (Typ.)	750 W										
Consumption per nits (Max.)	0.25 W										
Heating Unit	Typ: 1.2KW (Max: 1.7KW)										
Features	<table border="1"> <tr> <td>Auto Cooling System</td> <td>Yes</td> </tr> <tr> <td>Auto Heating System</td> <td>Yes</td> </tr> <tr> <td>Anti-Vandal Glass</td> <td>Yes (8mm = 3mm+3mm , AR Glass)</td> </tr> <tr> <td>Anti Reflection Coating</td> <td>Yes</td> </tr> <tr> <td>Auto Brightness Sensor</td> <td>Yes</td> </tr> </table>	Auto Cooling System	Yes	Auto Heating System	Yes	Anti-Vandal Glass	Yes (8mm = 3mm+3mm , AR Glass)	Anti Reflection Coating	Yes	Auto Brightness Sensor	Yes
Auto Cooling System	Yes										
Auto Heating System	Yes										
Anti-Vandal Glass	Yes (8mm = 3mm+3mm , AR Glass)										
Anti Reflection Coating	Yes										
Auto Brightness Sensor	Yes										
Operation	<table border="1"> <tr> <td>Temperature (°C)</td> <td>-30 ~ 50</td> </tr> <tr> <td>Humidity (%)</td> <td>20 - 80</td> </tr> <tr> <td>Storage (°C)</td> <td>-40 ~ 60</td> </tr> <tr> <td>OSD Language</td> <td>12 Lang</td> </tr> </table>	Temperature (°C)	-30 ~ 50	Humidity (%)	20 - 80	Storage (°C)	-40 ~ 60	OSD Language	12 Lang		
Temperature (°C)	-30 ~ 50										
Humidity (%)	20 - 80										
Storage (°C)	-40 ~ 60										
OSD Language	12 Lang										
Approvals	Ingress Protection IP66										
Dimension	Set (W x H x D), inch mm 49.40 x 88.77 x 9.05 1255 x 2255 x 230										
Weight	Set (lb kg) 555.56 252										
Mounting (Bottom mounting)	M10 wedge anchor (8 pcs)										

Specifications and design are subject to change without notice. See our website for detailed information.

HEAD OFFICE - HYUNDAI IT CO., LTD.
5F, 36, Sangil-ro 10-gil, Gangdong-gu, Seoul, 05288 Korea
Tel. +82 70 7008 0151 E-mail: ss0h@hdit.co.kr
www.hdit.co.kr

HYUNDAI IT AMERICA CORP.
2051 Junction AVE., Suite 112 San Jose, CA 95131, USA
Tel. +1 408 954 8920 email : sales@hyundaita.com
www.hyundait.com

HYUNDAI IT EUROPE GMBH
Borsig Str. 11-13
65205 Wiesbaden, Germany
Tel. +49(0) 6122-70342-10 email : info@hyundait.eu
www.hyundait.eu

OUTDOOR DIGITAL SIGNAGE

MODEL

CLASS

H757SSV

75"

FEATURES

All Weather Capable

Equipped with an intelligent cooling and heating system, HYUNDAI's Outdoor Displays are well suited for withstanding any weather conditions from -30°C to +50°C.

Sunlight Readable

HYUNDAI provides special displays which are based on the Optical Bonding for installatons in environment with the brightest lightning conditions. Make your messages and images clear and readable under even bright sunlight.

Anti-Vandal Protection


Thanks to a special tempered security glass. HYUNDAI's Outdoor Displays are protected against any vandalism attacks using Anti-Vandal glass bonding technique improving in durability from outside damage.

Cost Effective Media Player

HYUNDAI IT's display serves in-built media player enables to play various range of content including video, images and photos. Thanks to this solution, no need for an additional media player for cost and space efficiency.

DIMENSIONS

[unit: mm | [inch]]

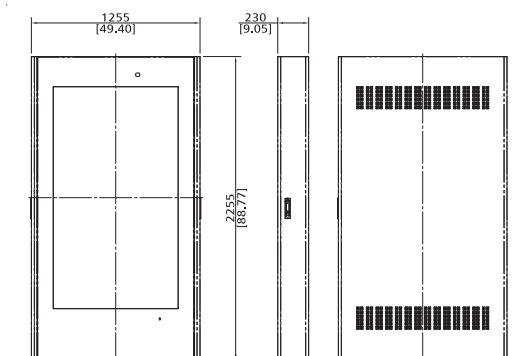

UPDATE : FEB. 2019