

TERRA SERIES LED ALL-IN-ONE

108"/135"/163"/216"

- Lightweight and slim
- Fast and efficient
- Smart collaboration



Ultra-slim design with stunning visuals

27.8mm ultra-slim cabinet and 4kg lightweight single cabinet design
Ultra-narrow bezel, 95% screen-to-body ratio

FHD/UHD display



27.8mm
ultra-slim cabinet

4kg
lightweight single cabinet

95%
screen-to-body ratio

Smart commercial display, quick interaction

Built-in multiple software applications and support for customized welcome pages.

- Remote Control
- Document Management
- Meeting Whiteboard

16:9 perfect aspect ratio

Suitable for a wide range of commercial display applications such as smart conferences, exhibition halls and showrooms.

Wireless screen sharing & remote collaboration

Supports wireless display and split-screen display for PCs, mobile phones and tablets, and allows four devices to display the screen simultaneously for easy and efficient interaction.

Dual system available




Intelligent point-by-point correction for true colour reproduction

Intelligent point-by-point correction for quick fixes and consistent picture reproduction.

High greyscale in low brightness for continued comfortable viewing


Low brightness while maintaining high greyscale for undistorted picture quality.

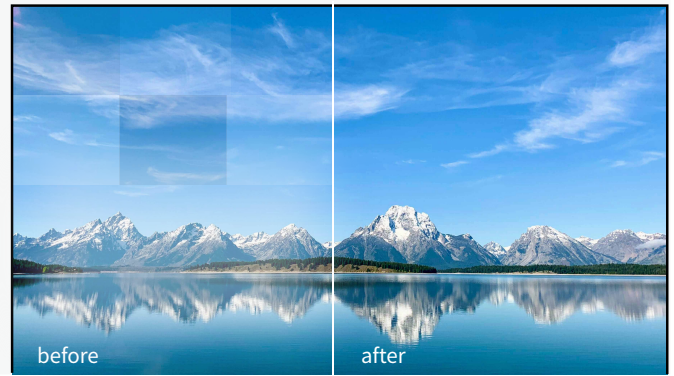

Easy installation & flexible performance

Multiple mounting options supported: mobile stand, wall mounting.

Full front maintenance design for easier installation and maintenance.

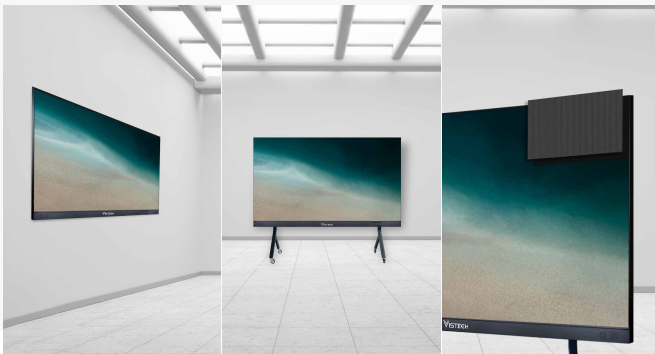

Integrated design for the ultimate in visual and audio

Built-in double speakers with professional tuning and fully upgraded audio resolution calculations for an immersive and synergetic experience.



SPECIFICATIONS

Model	S108LEDVB-FSN	S135LEDVB-FSN	S163LEDVB-FSN	S216LEDVB-USN
Resolution	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160
Overall Dimensions (W x H x D mm)	2416 x 1498 x 45	3016 x 1835.5 x 45	3616 x 2173 x 45	4816 x 2848 x 45
Actual Screen Dimensions (W x H x D mm)	2400 x 1350 x 27.8	3000 x 1687.5 x 27.8	3600 x 2025 x 27.8	4800 x 2700 x 27.8
Installation Method	Mobile Stand/Wall Mounting	Mobile Stand/Wall Mounting	Mobile Stand/Wall Mounting	Wall Mounting
Refresh Rate(Hz)	3840	3840	3840	3840
Brightness(nits)	800	800	800	800
Gray Scale(Bit)	16	16	16	16
Contrast Ratio	≥4000:1	≥4000:1	≥4000:1	≥4000:1
Viewing Angle(H./V.)	160°/140°	160°/140°	160°/140°	160°/140°
Maintenance Method	Front	Front	Front	Front
Operating System	Android8.0ARM Cortex-A73 dual-core processor+GPUQuad-core Mali-450 GPU			
Working Voltage	AC:100V~240V, 50/60Hz	AC: 100V~240V, 50/60Hz	AC: 100V~240V, 50/60Hz	AC: 100V~240V, 50/60Hz
Power Consumption Max(W)	1580	2360	3280	5060
Power Consumption AVG(W)	530	790	1100	1700
Storage Temp(°C)	-20 ~ 60	-20 ~ 60	-20 ~ 60	-20 ~ 60
Operating Temp(°C)	-10 ~ 50	-10 ~ 50	-10 ~ 50	-10 ~ 50
Storage Humidity(%RH)	10 ~ 90	10 ~ 90	10 ~ 90	10 ~ 90
Humidity Range(%RH)	10 ~ 80	10 ~ 80	10 ~ 80	10 ~ 80